




AQUAMAXX®



SKU #3

KEY FEATURES

- 100% drainage backing system - drains at 787.15 in/hr (ASTM F1551)
- Water and waste drain directly through the backing – Fast drainage and our exclusive backing reduces pet odors and kills bacteria
- Anti-Microbial Construction
- Thermally stable, wrinkle free backing
- Cooling Technology - lowers lawn surface temperature
- Created with an incredible tuft bind; dogs won't be able to dig through the extremely tough backing
- Enhanced fiber memory creating increased resilience while giving a soft feel and realistic look. Perfect for high traffic areas

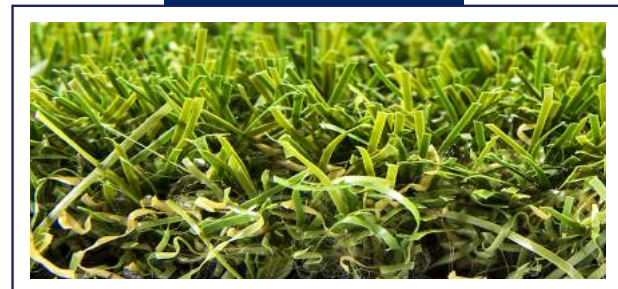

RECOMMENDED APPLICATIONS



FOOT TRAFFIC



PRODUCT SPECIFICATIONS

Yarn Type	Polyethylene Monofilament & Polypropylene
Yarn Color	Sport Green, Apple Green, & Olive Green
Thatch Color	Field Green & Tan
Weight	50 oz/sy
Pile Height	1"
Yarn Denier	990/9-1100
Backing	Anti-Microbial Urethane
Width	15 ft
Warranty	15-Year Warranty



844.368.4765 | www.GoGreenSynTurf.com



ARCHITECT


DESIGN AND BUILD

TESTING SPECIFICATIONS


ASTM D1335 - Tuft Bind	12 LB
ASTM F2765 - Lead Levels	<0.01ppm
ASTM D2859 - Flammability (Pill Test)	Pass
ASTM E648 - Flammability (Critical Radiant Flux)	Pass
ASTM 5034 - Grab Tear Strength	Pass
ASTM F1951 - ADA Wheelchair.....	Compliant
ASTM F1551 - Water Permeability.....	787.15 in/hr
ASTM 1292 - Impact Attenuation	Pass

GoGreenSynTurf.com | Resources

- Platinum AquaMaxx®
- 2D CAD Files
- BIM and 3D Files
- Specifications

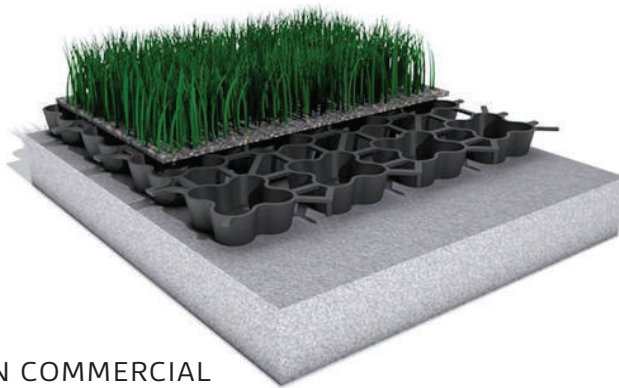

PET/DOG RUN COMMERCIAL
INSTALLATION WITH AIRDRAIN SYSTEM

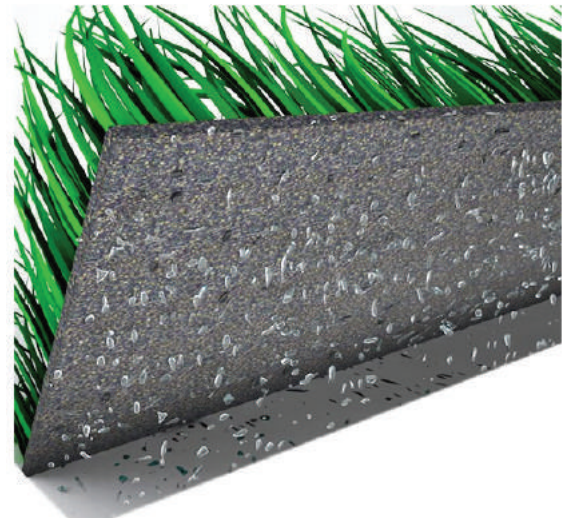

DEMONSTRATION OF 100% PERMEABLE BACKING